


DYNAMIC ENGINEERING

435 Park Dr., Ben Lomond, Calif. 95005
831-336-8891 Fax 831-336-3840
<http://www.dyneng.com>
sales@dyneng.com
Est. 1988

User Manual

cPCI2PMC

cPCI 1 Slot PMC Compatible Carrier

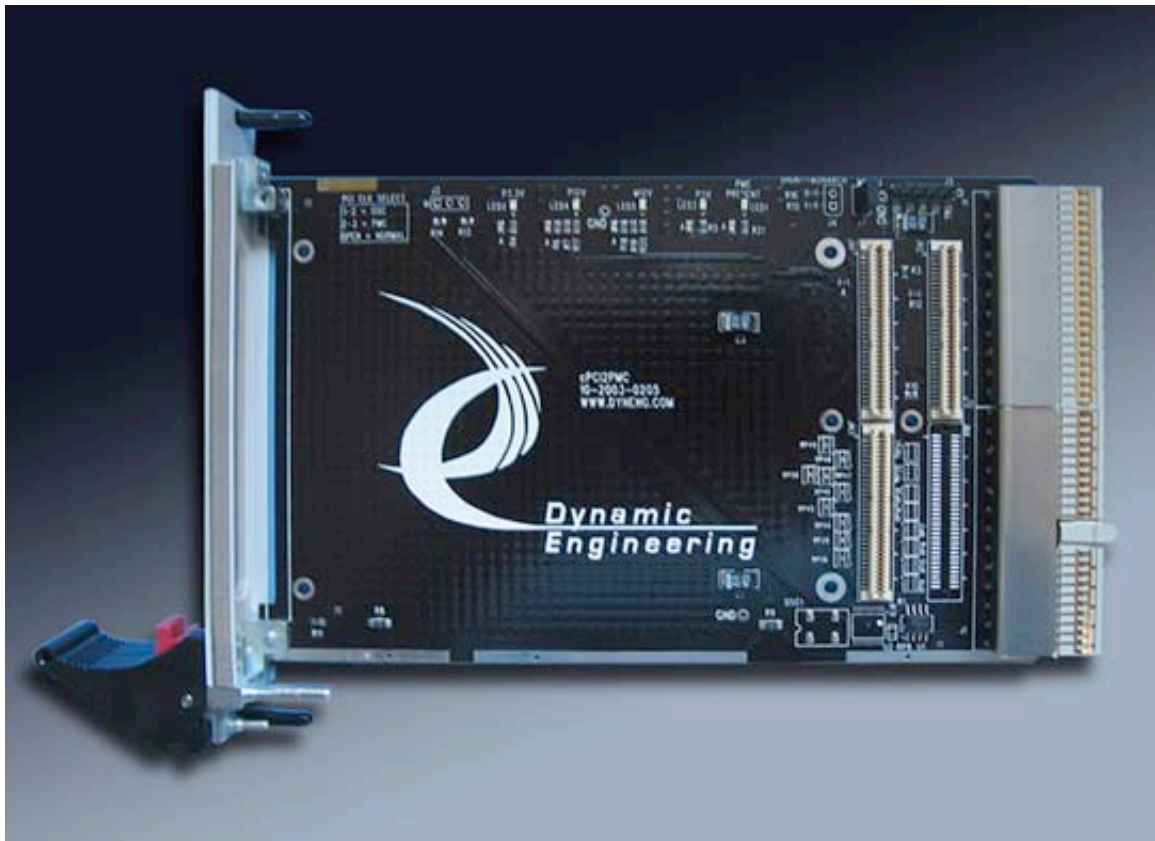

Revision C
Corresponding Hardware: Revision A-E
10-2003-0205

cPCI2PMC
cPCI and PMC Compatible Carrier

Dynamic Engineering
435 Park Drive
Ben Lomond, CA 95005
831-336-8891
831-336-3840 FAX

This document contains information of proprietary interest to Dynamic Engineering. It has been supplied in confidence and the recipient, by accepting this material, agrees that the subject matter will not be copied or reproduced, in whole or in part, nor its contents revealed in any manner or to any person except to meet the purpose for which it was delivered.

Dynamic Engineering has made every effort to ensure that this manual is accurate and complete. Still, the company reserves the right to make improvements or changes in the product described in this document at any time and without notice. Furthermore, Dynamic Engineering assumes no liability arising out of the application or use of the device described herein.

The electronic equipment described herein generates, uses, and can radiate radio frequency energy. Operation of this equipment in a residential area is likely to cause radio interference, in which case the user, at his own expense, will be required to take whatever measures may be required to correct the interference.

Dynamic Engineering's products are not authorized for use as critical components in life support devices or systems without the express written approval of the president of Dynamic Engineering.

Connection of incompatible hardware is likely to cause serious damage.

©2003 by Dynamic Engineering.
Other trademarks and registered trademarks are owned by their respective manufacturers.
Manual Revision A. Revised 4/14/05



Table of Contents

PRODUCT DESCRIPTION	5
PMC MODULE BACKPLANE IO INTERFACE PIN ASSIGNMENT	7
PMC MODULE BACKPLANE 64 BIT INTERFACE PIN ASSIGNMENT	8
APPLICATIONS GUIDE	9
Interfacing	9
Construction and Reliability	9
Thermal Considerations	10
WARRANTY AND REPAIR	11
Service Policy	11
Out of Warranty Repairs	11
For Service Contact:	11
SPECIFICATIONS	12
ORDER INFORMATION	13



List of Figures

FIGURE 1	CPCI2PMC PN4 INTERFACE STANDARD	7
FIGURE 2	CPCI2PMC PN3 INTERFACE STANDARD	8

Product Description

cPCI2PMC is part of the PCI and PMC Compatible family of modular I/O components. The PC2PMC adapts one PMC to one PCI slot.

Special features:

- cPCI 3U 4HP card.
- LED on PMC Busmode "Present"
- LED on plus 12
- LED on minus 12
- LED on plus 5
- LED on 3.3V
- 32 or 64 bit PCI operation
- Monarch mode options to provide or drive the PCI clock
- 33 or 66 MHz operation
- M66EN jumper option
- 10 ohm series resistors on AD31-0
- Zero delay buffer for PCI clock distribution
- Front panel connector access through cPCI bracket
- User IO [Pn4] available through J2
- Passive design for optimal electrical and thermal performance of PMC

The cPCI2PMC is a passive design incurring no added delays in connection from the PCI to the PMC buses. The design incorporates features to prevent the physical length of the traces from affecting operation. There may be cases where the backplane can't support all slots with cPCI2PMC cards installed. The [cPCIBPMC3U64](#) can be used when bridged card is required.

The only standard shunt option on the cPCI2PMC is the one for M66EN. M66EN is pulled high on the backplane for each cPCI bus stub. If any device within that stub can't operate at 66 Mhz that device grounds M66EN to take the frequency to 33 MHz. The cPCI pin, PMC pin and shunt are tied together to allow the PMC, shunt or another device to select the frequency of operation. Please note that the master must be 66 MHz capable for any of the devices to operate at that frequency. The shunt is clearly marked on the silk screen.

The JTAG pins on the PMC are brought to a header for convenience. The pin definitions are in the silk screen. The JTAG pins on the cPCI connector are not recommended for use [per cPCI specification] and are not connected to the header. TDI is tied to TDO at the cPCI connector.

PrPMC devices are sometimes operated in "Monarch Mode" where the PMC drives the PCI clock. The Revision E fab has a new feature which is the addition of an optional location for an oscillator and clock buffer. The backplane can drive the PMC clock, the oscillator can source the backplane



and PMC or the PMC can drive the backplane depending on how the parts are assembled. J3 is used to select between the oscillator, PMC, and backplane clock when the monarch mode hardware is installed. J3 (1-2) selects the oscillator, J3(2-3) selects the PMC and open = backplane. Please note that resistor R1 is left off when the PMC or Oscillator options will be used to isolate the PLL. The PLL is part of the backplane clock distribution circuit.

In addition; when J4 has a shunt installed PN2 pin 64 is pulled low via a 1K Ω resistor, otherwise that pin is pulled high via 10K Ω . Pin 64 is sometimes used to select the mode the CPU on a PrPMC initializes into.

Please refer to the ordering section for a description of the options.



PMC Module Backplane IO Interface Pin Assignment

The figure below gives the pin assignments for the PMC Module IO Interface – from Pn4 to the cPCI J2 connectors. Please note that the connections shown are only in effect when the -IO option is selected. Also see the User Manual for your PMC board for more information. Additional Power pins defined by cPCI spec not shown.

J2		Pn4	
E13	D13	1	2
C13	B13	3	4
A13	E12	5	6
D12	C12	7	8
B12	A12	9	10
E11	D11	11	12
C11	B11	13	14
A11	E10	15	16
D10	C10	17	18
B10	A10	19	20
E9	D9	21	22
C9	B9	23	24
A9	E8	25	26
D8	C8	27	28
B8	A8	29	30
E7	D7	31	32
C7	B7	33	34
A7	E6	35	36
D6	C6	37	38
B6	A6	39	40
E5	D5	41	42
C5	B5	43	44
A5	E4	45	46
D4	C4	47	48
B4	A4	49	50
E3	D3	51	52
C3	B3	53	54
A3	E2	55	56
D2	C2	57	58
B2	A2	59	60
E1	D1	61	62
C1	B1	63	64

FIGURE 1

CPCI2PMC PN4 INTERFACE STANDARD

Read table:

J2-E13 = Pn4-1

J2-D13 = Pn4-2

etc.



PMC Module Backplane 64 Bit Interface Pin Assignment

The figure below gives the pin assignments for the PMC Module IO Interface – from Pn3 to the cPCI J2 connectors. Please note that the connections shown are only in effect when the -64 option is selected. Also see the User Manual for your PMC board for more information. Additional Power pins defined by cPCI spec not shown.

J2		Pn3	
		1	2
	C4	3	4 C_BE7#
E4	A5	5 C_BE6#	6 C_BE5#
D5		7 C_BE4#	8
	E5	9	10 PAR64
A6	B6	11 AD63	12 AD62
C6		13 AD61	14
	E6	15	16 AD60
A7	D7	17 AD59	18 AD58
E7		19 AD57	20
	A8	21	22 AD56
B8	C8	23 AD55	24 AD54
E8		25 AD53	26
	A9	27	28 AD52
D9	E9	29 AD51	30 AD50
A10		31 AD49	32
	B10	33	34 AD48
C10	E10	35 AD47	36 AD46
A11		37 AD45	38
	D11	39	40 AD44
E11	A12	41 AD43	42 AD42
B12		43 AD41	44
	C12	45	46 AD40
E12	A13	47 AD39	48 AD38
D13		49 AD37	50
	E13	51	52 AD36
A14	B14	53 AD35	54 AD34
C14		55 AD33	56
	E14	57	58 AD32
		59	60
		61	62
		63	64

FIGURE 2

CPCI2PMC PN3 INTERFACE STANDARD

Read table:
J2-C4 = Pn3-4
etc.

Undefined pins on Pn3 are GND or VIO
Undefined pins on J2 are open, power or ground per cPCI spec.



Applications Guide

Interfacing

Some general interfacing guidelines are presented below. Do not hesitate to contact the factory if you need more assistance.

Installation

The PMC is mounted to the cPCI2PMC prior to installation within the chassis. For best results: with the PCI bracket installed, install the PMC at an angle so that the PMC front panel bezel penetrates the cPCI bracket then rotate down to mate with the PMC [PnX] connectors.

If the cPCI bracket is not installed, plug in the PMC and then attach the cPCI bracket. Use the mounting screws that come with the PMC to secure to the cPCI2PMC.

There are four mounting locations. Two into the PMC mounting bezel and two for the standoffs near the PMC bus connectors.

Start-up

Make sure that the "system" can see your hardware before trying to access it. Many BIOS will display the PCI devices found at boot up on a "splash screen" with the VendorID and CardId for the PMC installed and an interrupt level. Look quickly! If the information is not available from the BIOS then a third party PCI device cataloging tool will be helpful. We use PCIView from Bsquare.

Watch the system grounds. All electrically connected equipment should have a fail-safe common ground that is large enough to handle all current loads without affecting noise immunity. Power supplies and power consuming loads should all have their own ground wires back to a common point.

Power all system power supplies from one switch. Be careful when using a system that has partially powered operation. Make sure that the installed PMC can handle the live IO with power off situation. The cPCI2PMC is passive and unlikely to be damaged.

Construction and Reliability

PMC Modules were conceived and engineered for rugged industrial environments. The cPCI2PMC is constructed out of 0.062 inch thick FR4 material. The components on the cPCI2PMC are passive and do not generate an appreciable thermal load.



Surface mounted components are used. The connectors are SMT for the PMC bus and through hole [compression fit] for the cPCI.

The PMC Module connectors are keyed and shrouded with Gold plated pins on both plugs and receptacles. They are rated at 1 Amp per pin, 100 insertion cycles minimum. These connectors make consistent, correct insertion easy and reliable.

The PMC Module is secured against the carrier with the PMC connectors. It is recommended, for enhanced security against vibration, that the PMC mounting screws are installed. The screws are supplied with the PMC from the OEM. Dynamic Engineering has screws, standoffs, blank bezels and other PMC hardware available at a reasonable cost if your PMC was not shipped with some of the require attachment hardware or if it has been misplaced.

Thermal Considerations

The cPCI2PMC design consists of passive circuits. The power dissipation due to internal circuitry is very low. If the PMC installed has a high heat dissipation then forced air cooling in the chassis is recommended.



Warranty and Repair

Please refer to the warranty page on our website for the current warranty offered and options.

<http://www.dyneng.com/warranty.html>

Service Policy

Before returning a product for repair, verify as well as possible that the suspected unit is at fault. Then call the Customer Service Department for a RETURN MATERIAL AUTHORIZATION (RMA) number. Carefully package the unit, in the original shipping carton if this is available, and ship prepaid and insured with the RMA number clearly written on the outside of the package. Include a return address and the telephone number of a technical contact. For out-of-warranty repairs, a purchase order for repair charges must accompany the return. Dynamic Engineering will not be responsible for damages due to improper packaging of returned items. For service on Dynamic Engineering Products not purchased directly from Dynamic Engineering contact your reseller. Products returned to Dynamic Engineering for repair by other than the original customer will be treated as out-of-warranty.

Out of Warranty Repairs

Out of warranty repairs will be billed on a material and labor basis. The current minimum repair charge is \$100. Customer approval will be obtained before repairing any item if the repair charges will exceed one half of the quantity one list price for that unit. Return transportation and insurance will be billed as part of the repair and is in addition to the minimum charge.

For Service Contact:

Customer Service Department
Dynamic Engineering
435 Park Dr.
Ben Lomond, CA 95005
831-336-8891
831-336-3840 fax
InterNet Address support@dyneng.com



Specifications

Logic Interfaces:	cPCI Interface 33/32 <-> 66/64
Access types:	PCI bus accesses
CLK rates supported:	33 or 66 MHz PCI clock rates
Software Interface:	defined by PMC installed
Jumpers:	M66EN selection, also selected by PMC or cPCI backplane Monarch mode options if installed
Interface:	PMC front bezel via cPCI bracket and User IO connector via J2 when -IO option installed
Dimensions:	3U 4HP cPCI
Construction:	FR4 Multi-Layer Printed Circuit, Through Hole and Surface Mount Components.
LEDs	+12,-12,+5, 3.3, Present

Order Information

standard temperature range 0-70°C

Extended temperature versions are available.

<http://www.dyneng.com/cPCI2PMC.html>

cPCI2PMC:Standard cPCI2PMC J2 not installed, IO through Bezel (front panel).

cPCI2PMC-IO: J2 installed and connected to Jn4 with standard rear panel IO def.

cPCI2PMC-IOJn3: J2 installed and connected to Jn4 with standard rear panel IO definitions. Jn3 is also installed.

cPCI2PMC-64 option: J2 installed and connected to Jn3 for upper cPCI bus signals

cPCI2PMC-64Jn4 option: J2 installed and connected to Jn3 for upper cPCI bus signals. Jn4 also installed

cPCI2PMC-M option: Monarch capability with PMC receiving clock input from added oscillator. System clock driven by cPCI2PMC. 33mhz

cPCI2PMC-M-IO option: Monarch capability with PMC receiving clock input from added oscillator. System clock driven by cPCI2PMC. 33mhz. J2 installed and connected to Jn4 with standard rear panel IO definitions

cPCI2PMC-M-64 option: Monarch capability with PMC receiving clock input from added oscillator. System clock driven by cPCI2PMC. 33mhz. J2 installed and connected to Jn3 for upper cPCI bus signals

cPCI2PMC-M-66 option: Monarch capability with PMC receiving clock input from added oscillator. System clock driven by cPCI2PMC. 66mhz

cPCI2PMC-M-66-IO option: Monarch capability with PMC receiving clock input from added oscillator. System clock driven by cPCI2PMC. 66mhz. J2 installed and connected to Jn4 with standard rear panel IO definitions

cPCI2PMC-M-66-64 option: Monarch capability with PMC receiving clock input from added oscillator. System clock driven by cPCI2PMC. 66mhz. J2 installed and connected to Jn3 for upper cPCI bus signals

cPCI2PMC-M1 option: Monarch capability with PMC driving PCI clock. System clock driven by PMC installed onto cPCI2PMC.



cPCI2PMC-M1-IO option: Monarch capability with PMC driving PCI clock. System clock driven by PMC installed onto cPCI2PMC. 33mhz. J2 installed and connected to Jn4 with standard rear panel IO definitions

cPCI2PMC-M1-64 option: Monarch capability with PMC driving PCI clock. System clock driven by PMC installed onto cPCI2PMC. 33mhz. J2 installed and connected to Jn3 for upper cPCI bus signals

cPCI2PMC-M1-66 option: Monarch capability with PMC driving PCI clock. System clock driven by PMC installed onto cPCI2PMC. 66mhz

cPCI2PMC-M1-66-IO option: Monarch capability with PMC driving PCI clock. System clock driven by PMC installed onto cPCI2PMC.66mhz. J2 installed and connected to Jn4 with standard rear panel IO definitions

cPCI2PMC-M1-66-64 option: Monarch capability with PMC receiving clock input from added oscillator. System clock driven by cPCI2PMC. 66mhz. J2 installed and connected to Jn3 for upper cPCI bus signals.

All information provided is Copyright Dynamic Engineering

